

DISCRETE DIFFERENTIAL GEOMETRY OF PROTEINS: A NEW METHOD FOR ENCODING THREE-DIMENSIONAL STRUCTURES OF PROTEINS

NAOTO MORIKAWA

ABSTRACT. In nature the three-dimensional structure of a protein is encoded in the corresponding gene. In this paper we describe a new method for encoding the three-dimensional structure of a protein into a binary sequence. The feature of the method is the correspondence between protein-folding and “integration”. A protein is approximated by a folded tetrahedron sequence. And the binary code of a protein is obtained as the “second derivative” of the shape of the folded tetrahedron sequence. With this method at hand, we can extract static structural information of a protein from its gene. And we can describe the distribution of three-dimensional structures of proteins without any subjective hierarchical classification.

CONTENTS

1. Overview	2
2. Basic idea: encoding of two-dimensional objects	2
2.1. Triangle sequence	2
2.2. Encoding of two-dimensional objects	3
2.3. Decoding of U/D sequences in $\mathbb{R}^2$	4
3. Encoding of three-dimensional objects	4
3.1. Tetrahedron sequence	5
3.2. Encoding of three-dimensional objects	5
3.3. Decoding of U/D sequences in $\mathbb{R}^3$	6
4. Examples	6
4.1. Double helix	6
4.2. 2HIU chain A (Insulin, human)	6
Appendix A. Differential geometry of N -hedron tiles	8
A.1. Space of N -hedron tiles	8
A.2. Differential structure on B	8
A.3. Cones and their boundary surfaces	9
A.4. Vector field on B	9
References	10

Date: Posted June 5, 2005.

1991 *Mathematics Subject Classification.* Primary 52B99, 53B99, 92D20 ; Secondary 52C22, 68R01, 92B05.

Key words and phrases. Discrete mathematics – Differential Geometry – Tetrahedron – Protein Structure – DNA sequences.

1. OVERVIEW

In nature the three-dimensional structure of a protein is encoded in the corresponding gene. In this paper we describe a new method for encoding the three-dimensional structure of a protein into a binary sequence (Fig.1).

In the method a protein is approximated by a tetrahedron sequence. For example, approximation Fig.1(b) is obtained by folding tetrahedron sequence Fig.1(c), where three tetrahedrons are assigned for each amino-acid. We would obtain more precise approximation if we use more tetrahedrons.

The feature of the method is the correspondence between protein-folding and “integration”. And the binary sequence is obtained as the “second derivative” of the shape of the folded tetrahedron sequence.

With this method at hand, we can extract static structural information of a protein from its gene. And we can describe the distribution of three-dimensional structures of proteins without any subjective hierarchical classification.

2. BASIC IDEA: ENCODING OF TWO-DIMENSIONAL OBJECTS

For simplicity we shall explain the basic idea behind the paper in the case of two-dimensional objects, where we use triangle sequences for approximation.

2.1. Triangle sequence. Consider a unit cube in the three-dimensional Euclidean space $\mathbb{R}^3$ whose vertices are given by $v_1, v_x, v_y, v_z, \dots$, and v_{xyz} , where $v_{x^l y^m z^n} := (l, m, n) \in \mathbb{Z}^3$ (Fig.2(a)). And draw lines $\overline{v_1 v_{xy}}$, $\overline{v_1 v_{yz}}$ and $\overline{v_1 v_{xz}}$. Then, each of three upper faces is divided into two slant-triangle-tiles. For example, $v_1 v_x v_{xy} v_y$ is divided into two slant-tiles $v_1 v_x v_{xy}$ and $v_1 v_y v_{xy}$.

Firstly, by piling up these unit cubes in the direction from v_{xyz} to v_1 , we obtain “peaks and valleys” with a “drawing” on it. The drawing is uniquely determined by its peaks and divides the surface into a collection of slant-triangle-tile sequences. For example, the drawing of Fig.2(b) is determined by two peaks, left $(2, 0, -1)$ and right $(0, 0, 0)$. And we denote the drawing by $Cone^*\{x^2/z, 1\}$.

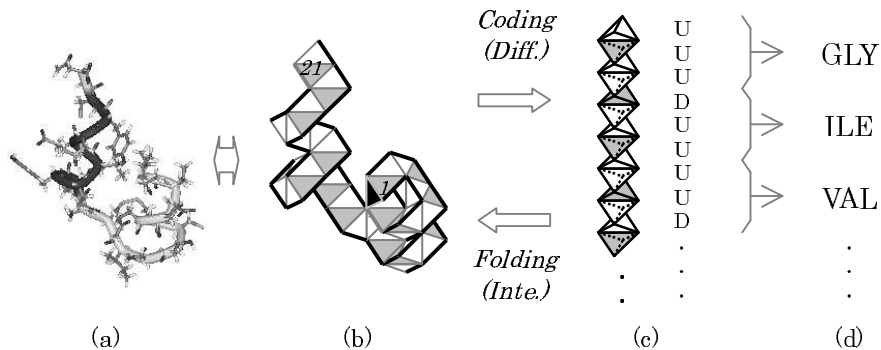


FIGURE 1. Overview. (a): Schematic diagram of 2HIU chain A (Insulin, human). (b): Approximation of 2HIU by a tetrahedron sequence. (c): The U/D sequence of approximation (b). (d): The amino-acid sequence of 2HIU. (The figure (a) is prepared using **WebLab Viewer** (Molecular Simulations Inc.).)

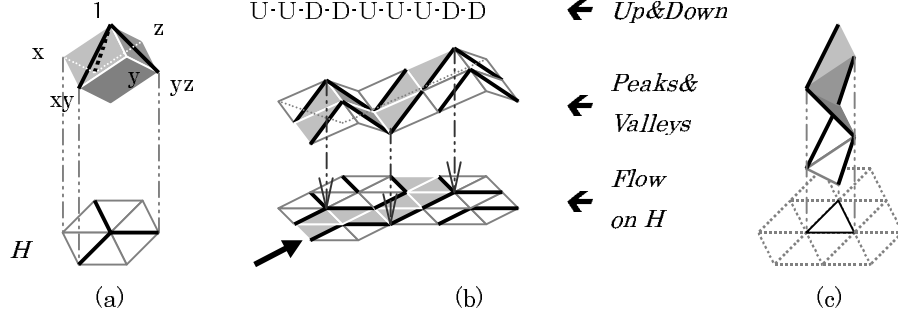


FIGURE 2. Basic idea. (a): Unit cube in $\mathbb{R}^3$ and its projection on H . (b): Slant-tile sequences and flat-tile sequences defined by $\text{Cone}^*\{x^2/z, 1\}$. (c): Slant-tiles over a flat-tile on H .

Secondly, by the projection onto the hypersurface $H := \{(a, b, c) \in \mathbb{R}^3 \mid a+b+c=0\}$, we obtain a division of H into a collection of flat-triangle-tile sequences. For example, the gray slant-tile sequence is projected onto the gray flat-tile sequence on H in Fig.2(b). We write $a[uv]$ for slant-tile $v_a v_{au} v_{auv}$ and $|a[uv]|$ for the corresponding flat-tile. For example, $1[xy]$ for $v_1 v_x v_{xy}$. Note that there are three types of slant-tiles over a flat-tile (Fig.2(c)). We shall see in the appendix that “peaks and valleys” specifies a “discrete vector field” of flat-tiles on H .

Finally we obtain a binary code of the shape of a flat-tile sequence by arranging up (U) and down (D) of the corresponding slant-tile sequence. For example, the gray flat-tile sequence in Fig.2(b) is encoded into U/D sequence

$$U - U - D - D - U - U - U - D - D.$$

In general we need more than one drawing to encode a flat-tile sequence because of overlaps among its peaks (Fig.3(c)). Each drawing encodes a part of the flat-tile sequence and its code is obtained by patching those “local codes” together.

2.2. Encoding of two-dimensional objects. Now let’s encode the two-dimensional object shown in Fig.3(a). First of all we should give a flat-tile sequence which approximates the object (Fig.3(b)).

Then, using encoding table Table 1(a), we obtain a binary code of the object (Fig.3(c)). The process is going on as follows:

- Step 1. Choose an initial value, say U ,
- Step 2. By the second row of the table, the second value is U ,
- Step 3. By the fourth row of the table, the third value is D , ...

As the result we obtain U/D sequence

$$(1) \ U - U - D - D - U - U - U - D - D - U - U - D - D - D - U - D - D - D - D.$$

Fig.3(c) shows the corresponding slant-tile sequence. In this case we need two drawings because of the overlap between two peaks $z^2/(y^2x)$ and z^3/x^2 . The left drawing $\text{Cone}^*\{1, z/y^2, z^2/(xy^2), z^3/x^2\}$ corresponds to the first sixteen tiles and the right drawing $\text{Cone}^*\{z^3/x^2\}$ to the last five tiles.

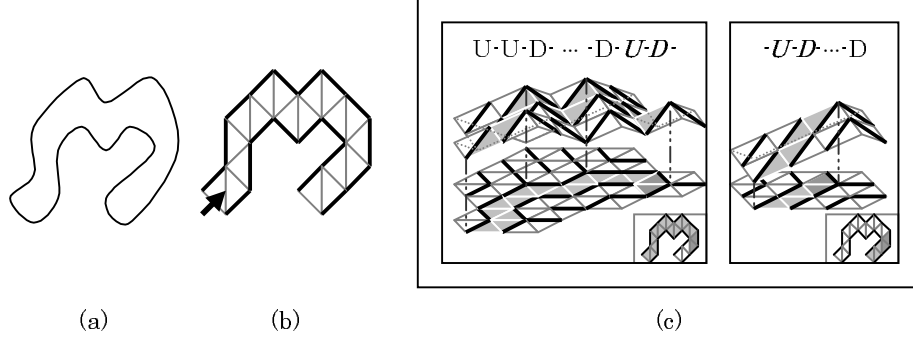


FIGURE 3. Encoding of a two-dimensional object. (a): Two-dimensional object. (b): Approximation by a triangle sequence. (c): Two drawings $Cone^*\{1, z/y^2, z^2/(xy^2), z^3/x^2\}$ and $Cone^*\{z^3/x^2\}$ which encode approximation (b).

	Cur. val.	→	Next val.	Slant tiles
	D	→	D	
	U	→	U	
	D	→	U	
	U	→	D	

(a)

	Cur. tile	→	Next tile	Slant tiles
D·D·		→		
D·U·		→		
U·D·		→		
U·U·		→		

(b)

TABLE 1. Tables for two-dimensional objects. (a): Encoding table. (b): Decoding table. (The gray tile is the current one.)

2.3. Decoding of U/D sequences in $\mathbb{R}^2$. To decode U/D sequences in $\mathbb{R}^2$ we use decoding table Table 1(b). For example, decoding process of U/D sequence (1) is going on as follows:

- Step 1. Choose an initial flat-tile, say $|x[yx]|$,
- Step 2. By the fourth row of the table, the second flat-tile is $|1[xy]|$,
- Step 3. By the third row of the table, the third flat-tile is $|1[xz]|$, ...

As the result we obtain the flat-tile sequence shown in Fig.3(b).

3. ENCODING OF THREE-DIMENSIONAL OBJECTS

If we consider unit cubes in the four-dimensional Euclidean space $\mathbb{R}^4$, we shall obtain a three-dimensional drawing made up of slant-“tetrahedron”-tiles. And we approximate a three-dimensional object by a tetrahedron sequence (Fig.1(c)), where

- (1) each tetrahedron consists of four short edges and two long edges, where the ratio of the length is $\sqrt{3}/2$ and
- (2) successive tetrahedrons are connected via a long edge and have the rotational freedom around the edge.

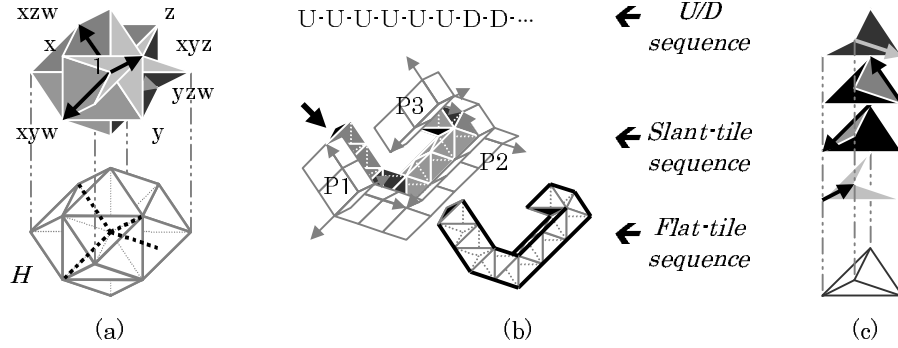


FIGURE 4. Encoding of three-dimensional objects. (a): Unit cube in $\mathbb{R}^4$ and its projection on H . (b): Slant-tile sequence and flat-tile sequence defined by three peaks $P_1 = 1$, $P_2 = z^2/(x^3yw)$, and $P_3 = z^2/(x^2y^2w)$. (c): Slant-tiles over a flat-tile on H . (In the figures arrows indicate the direction of “down”.)

3.1. Tetrahedron sequence. Consider a unit cube in the four-dimensional Euclidean space $\mathbb{R}^4$ whose vertices are given by $v_1, v_x, v_y, v_z, v_w, \dots$, and v_{xyzw} , where $v_{x^l y^m z^n w^k} := (l, m, n, k) \in \mathbb{Z}^4$ (Fig.4(a)). And divide each of four upper three-dimensional faces into six slant-tetrahedron-tiles. For example, the face defined by v_1, v_x, v_z , and v_y is divided into six slant-tiles $v_1 v_x v_{xy} v_{xyz}$, $v_1 v_y v_{yx} v_{xyz}$, $v_1 v_y v_{yz} v_{zyx}$, $v_1 v_z v_{zy} v_{zyx}$, $v_1 v_x v_{xz} v_{xzy}$, and $v_1 v_z v_{zx} v_{zxy}$.

Firstly, by piling up these unit cubes in the direction from v_{xyzw} to v_1 , we obtain four-dimensional “peaks and valleys” with a three-dimensional “drawing” on it. The drawing is uniquely determined by its peaks and divides the three-dimensional surface into a collection of slant-tetrahedron-tile sequences. For example, the drawing of Fig.4(b) is determined by three peaks P_1, P_2 and P_3 . And we denote the drawing by $\text{Cone}^*\{P_1, P_2, P_3\}$.

Secondly, by the projection onto the hypersurface $H := \{(a, b, c, d) \in \mathbb{R}^4 \mid a + b + c + d = 0\}$, we obtain a division of H into a collection of flat-tetrahedron-tile sequences. For example, Fig.4(b) shows a slant-tile sequence and its projection onto H . We write $a[uvw]$ for slant-tile $v_a v_{au} v_{auv} v_{auvw}$ and $|a[uvw]|$ for the corresponding flat-tile. Note that there are four types of slant-tiles over a flat-tile (Fig.4(c)). For example, $|1[xyz]| = |x[yzw]| = |xy[zwx]| = |xyz[wxy]|$.

Finally we obtain a binary code of the shape of a flat-tile sequence by arranging up (U) and down (D) of the corresponding slant-tile sequence. For example, the flat-tile sequence shown in Fig.4(b) is encoded into U/D sequence

$$(2) \quad U^6 - D^4 - U^7 - D - U - D.$$

3.2. Encoding of three-dimensional objects. To encode three-dimensional objects we use encoding table Table 2(a). For example, encoding of the flat-tile sequence shown in Fig.4(b) proceeds as follows:

- Step 1. Choose an initial value, say U ,
- Step 2. By the second row of the table, the second value is U ,
- Step 3. By the second row of the table, the third value is $U, \dots$

As the result we obtain U/D sequence (2).

	Cur. val. → Next val.	Slant tiles		Cur. tile → Next tile	Slant tiles
	D → D		D · D ·		
	U → U				
	D → U		U · D ·		
	U → D		U · U ·		

TABLE 2. Tables for three-dimensional objects. (a): Encoding table. (b): Decoding table. (The gray tile is the current one.)

3.3. Decoding of U/D sequences in $\mathbb{R}^3$. To decode U/D sequences in $\mathbb{R}^3$ we use decoding table Table 2(b). For example, decoding of U/D sequence (2) proceeds as follows:

- Step 1. Choose an initial flat-tile, say $|xw^2z^2[xzw]|$,
- Step 2. By the fourth row of the table, the second flat-tile is $|xwz^2[wxyz]|$,
- Step 3. By the fourth row of the table, the third flat-tile is $|xwz[zwx]|$,

As the result we obtain the flat-tile sequence shown in Fig.4(b).

4. EXAMPLES

4.1. Double helix. Here let's consider the double helix shown in Fig.5(a) which has 12 tiles per turn. (Cf. DNA has an average of 10.9 (type A) or 10 (type B) nucleotide pairs per turn ([1]).) To encode the shape of the helix, it is enough to consider the flat-tile sequence shown in Fig.5(b).

Using Table 2(a) with initial slant-tile $y[zxy]$, we obtain two drawings of Fig.5(c). $Cone^*\{P_1, P_2\}$ (left) encodes the first ten tiles. And $Cone^*\{P_2, P_3\}$ (right) encodes the last ten tiles. By patching these local codes together, we obtain the U/D code of helix Fig.5(b):

$$U - U - D - D - D - D - U - U - D - D - D - D - U - U - D - D.$$

4.2. 2HIU chain A (Insulin, human). Next let's consider the three-dimensional structure of 2HIU chain A (Fig.1). Using Table 2(a) with initial slant-tile $zw[xyz]$,

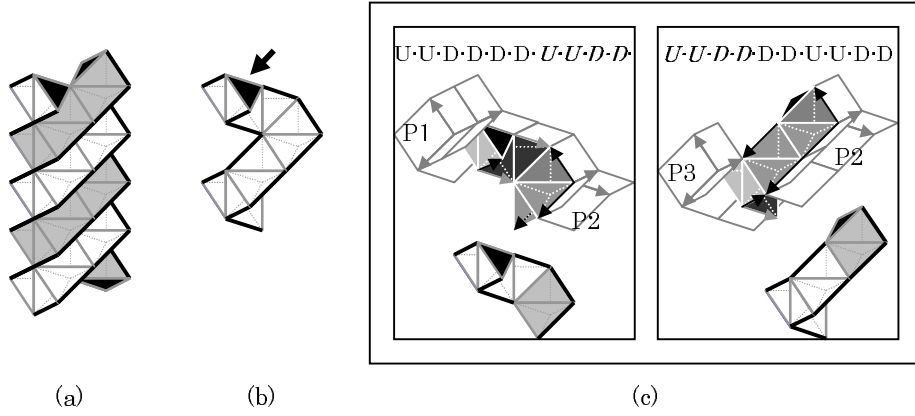


FIGURE 5. Double helix. (a): Double helix formed by two tetrahedron sequences. (b): Part of the helix. (c): Slant-tile sequence and flat-tile sequence defined by $P_1 = 1$, $P_2 = y^2z/x$, and $P_3 = y^2w^2$.

we obtain eight drawings:

- | | |
|---|---------------|
| - $\text{Cone}^*\{z/y, 1/(x^2w), 1/(x^2z)\}$ | for [1, 14], |
| - $\text{Cone}^*\{1/(xy), 1/(x^2w), 1/(x^2z)\}$ | for [7, 18], |
| - $\text{Cone}^*\{1/(xy), 1/(x^3zw), 1/(x^3z^2), w/(xyz)\}$ | for [13, 29], |
| - $\text{Cone}^*\{1/(xyz^2), 1/(x^3zw), 1/(x^3z^2), xw/y^2\}$ | for [16, 42], |
| - $\text{Cone}^*\{xw^2/(yz), w/y, xw/y^2\}$ | for [36, 45], |
| - $\text{Cone}^*\{xw^2/(yz), 1/y^2, x/y^3\}$ | for [40, 51], |
| - $\text{Cone}^*\{x/(y^4z), 1/y^2, x/(y^4w)\}$ | for [45, 57], |
| - $\text{Cone}^*\{x/(y^4z), 1/(y^4w^2)\}$ | for [52, 63]. |

($[n, m]$ denotes the part of the sequence from the n -th tile to the m -th tile.)

By patching these local codes together, we obtain the U/D code of the three-dimensional structure of the protein (Fig.1)(c):

$U - U - U - D - U - U - U - U - D - D - U - U - D - D - U$
 $- D - U - U - U - U - D - D - U - U - D - D - D - D - U - U$
 $- U - D - D - D - D - D - D - U - U - D - D - U - D - U - U$
 $- U - U - D - D - U - U - U - U - D - D - U - U - U - U - D$
 $- D - D - D.$

Table 3 shows the correspondence between the U/D code and the amino-acid sequence of the protein. (Also see Fig.1(c) and (d).)

TABLE 3. U/D code and the amino-acid sequence of 2HIU chain
A. (0 denotes $D - D - D$, 1 denotes $D - D - U$ and so on.)

No.	1	2	3	4	5	6	7	8
Amino-acid	GLY	ILE	VAL	GLU	GLN	CYS	CYS	THR
U/D code	7	3	6	3	1	3	6	3
No.	9	10	11	12	13	14	15	16
Amino-acid	SER	ILE	CYS	SER	LEU	TYR	GLN	LEU
U/D code	0	3	4	0	3	1	3	6
No.	17	18	19	20	21			
Amino-acid	GLU	ASN	TYR	CYS	ASN			
U/D code	3	6	3	6	0			

APPENDIX A. DIFFERENTIAL GEOMETRY OF N -HEDRON TILES

A.1. **Space of N -hedron tiles.** Let L_N^* be the collection of all integer points of the N -dimensional Euclidean space $\mathbb{R}^N$:

$$L_N^* := \{x_1^{l_1} x_2^{l_2} \cdots x_N^{l_N} \mid l_i \in \mathbb{Z} \text{ for all } i\}.$$

And consider the collection S of all “slant” N -hedrons defined by L_N^* :

$$S := \{a [x_{\rho(1)} \cdots x_{\rho(N-1)}] \mid a \in L_N^*, \rho \in S_N\},$$

where S_N is the N -th symmetric group and $a [x_{\rho(1)} \cdots x_{\rho(N-1)}]$ denotes the convex hull $\text{conv}[a_0, a_1, \dots, a_{N-1}]$ of N points $a_0 = a, a_1 = ax_{\rho(1)}, \dots, a_{N-1} = ax_{\rho(1)}x_{\rho(2)} \cdots x_{\rho(N-1)}$ in $\mathbb{R}^N$:

$$a [x_{\rho(1)} \cdots x_{\rho(N-1)}] := \left\{ \prod_{0 \leq i < N} a_i^{\lambda_i} \mid 0 \leq \lambda_i \in \mathbb{R} \text{ s.t. } \sum_{0 \leq i < N} \lambda_i = 1 \right\}.$$

The collection B of all “flat” N -hedrons is defined as the quotient of S by “shift operator” σ on S (Fig.6(a)). That is, $B := S/\sigma$, where

$$\sigma(a [x_{\rho(1)} \cdots x_{\rho(N-1)}]) := ax_{\rho(1)} [x_{\rho(2)} \cdots x_{\rho(N)}].$$

A.2. **Differential structure on B .** “Tangent bundle” $T[B]$ on B is defined as the quotient of S by σ^N :

$$T[B] := S/\sigma^N,$$

$$\pi : T[B] \rightarrow B, \pi(s \bmod \sigma^N) := s \bmod \sigma.$$

We identify $T[B]$ with $B \times \{e/x_1, e/x_2, \dots, e/x_N\}$ ($e = x_1 x_2 \cdots x_N$) by one-to-one correspondence

$$s \bmod \sigma^N \sim (s \bmod \sigma, Ds),$$

where the “gradient” Ds of $s \in S$ is defined by

$$Da [x_{\rho(1)} \cdots x_{\rho(N-1)}] := x_{\rho(1)} \cdots x_{\rho(N-1)} = e/x_{\rho(N)}.$$

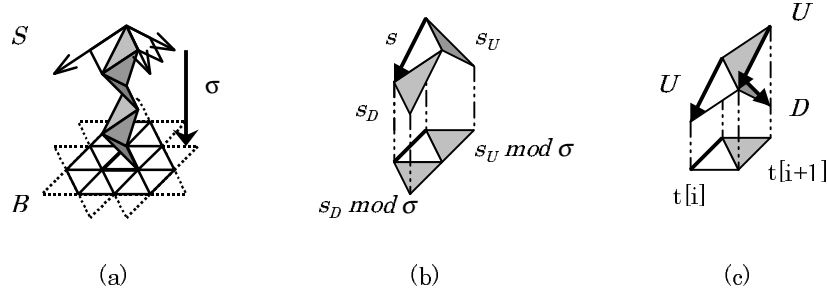


FIGURE 6. Differential geometry of 3-hedron tiles. (a): Fiber of S over a point of B . (b): The local trajectory specified by $s \in S$. (c): The second derivative along orbit $\{t[i]\}$.

Let $s = a[x_{\rho(1)} \cdots x_{\rho(N-1)}] \in S$. Then $s \bmod \sigma^N \in T[B]$ specifies “local trajectory” $\{s_U \bmod \sigma, s_D \bmod \sigma\}$ at $s \bmod \sigma \in B$ (Fig.6(b)), where

$$\begin{aligned} s_U &:= a[x_{\rho(1)} \cdots x_{\rho(N-2)} x_{\rho(N)}], \\ s_D &:= a x_{\rho(1)} [x_{\rho(2)} \cdots x_{\rho(N-1)} x_{\rho(1)}]. \end{aligned}$$

And we shall obtain a flow on B by patching these local trajectories together.

A.3. Cones and their boundary surfaces. Let $\mathbb{PHN}^N := \{Cone^* A \mid A \subset L_N^*\}$, where

$$Cone^* A := \{p x_1^{l_1} x_2^{l_2} \cdots x_N^{l_N} \in L_N^* \mid p \in A \text{ and } 0 \leq l_i \in \mathbb{Z} \text{ for all } i\}.$$

That is, $\mathbb{PHN}^N$ is the collection of all “cones” defined by L_N^* . And we denote the “boundary surfaces” of $w \in \mathbb{PHN}^N$ by $d_S w$:

$$d_S w := \{conv[a_0, a_1, \dots, a_{N-1}] \in S \mid l_w(a_i) = 0 \text{ for all } i\},$$

where $l_w(z) := \max_{p \in w} \left\{ \min_{1 \leq i \leq N} \left\{ l_i \in \mathbb{Z} \mid \prod_{1 \leq i \leq N} y_i^{l_i} = z/p \right\} \right\}$ for $z \in L_N^*$.

The boundary surfaces of a cone induce a vector field on B .

A.4. Vector field on B . Let $w \in \mathbb{PHN}^N$. Then $d_S w$ specifies a unique N -hedron $s \in d_S w$ over each $t \in B$, which we denote by $\Gamma_w(t)$:

$$\Gamma_w(t) := \text{the unique } N\text{-hedron } s \in d_S w \text{ s.t. } t = s \bmod \sigma.$$

And Γ_w induces vector field X_w over B :

$$X_w(s \bmod \sigma) := D\Gamma_w(s \bmod \sigma).$$

Let $\{t[i]\} \subset B$ be a trajectory defined by vector field X_w . And we define the “second derivative” $D^2\Gamma_w(t[i])$ of Γ_w along $\{t[i]\}$ as a $\{U, D\}$ -valued function by

$$D^2\Gamma_w(t[i+1]) := \begin{cases} D^2\Gamma_w(t[i]) & \text{if } X_w(t[i+1]) = X_w(t[i]), \\ -D^2\Gamma_w(t[i]) & \text{else,} \end{cases}$$

where $-D := U$ and $-U := D$ (Fig.6(c)).

Then we can encode the $N-1$ -dimensional structure of any trajectory by the second derivative along the trajectory, i.e., an U/D sequence.

REFERENCES

1. C.Branden and J.Toose, Introduction to Protein Structure. Garland Publishing Inc., New York. 1998.

GENOCRIPT, 27-22-1015, SAGAMI-GA-OKA 1-CHOME, ZAMA-SHI, KANAGAWA 228-0001 JAPAN
E-mail address: nmorika@f3.dion.ne.jp